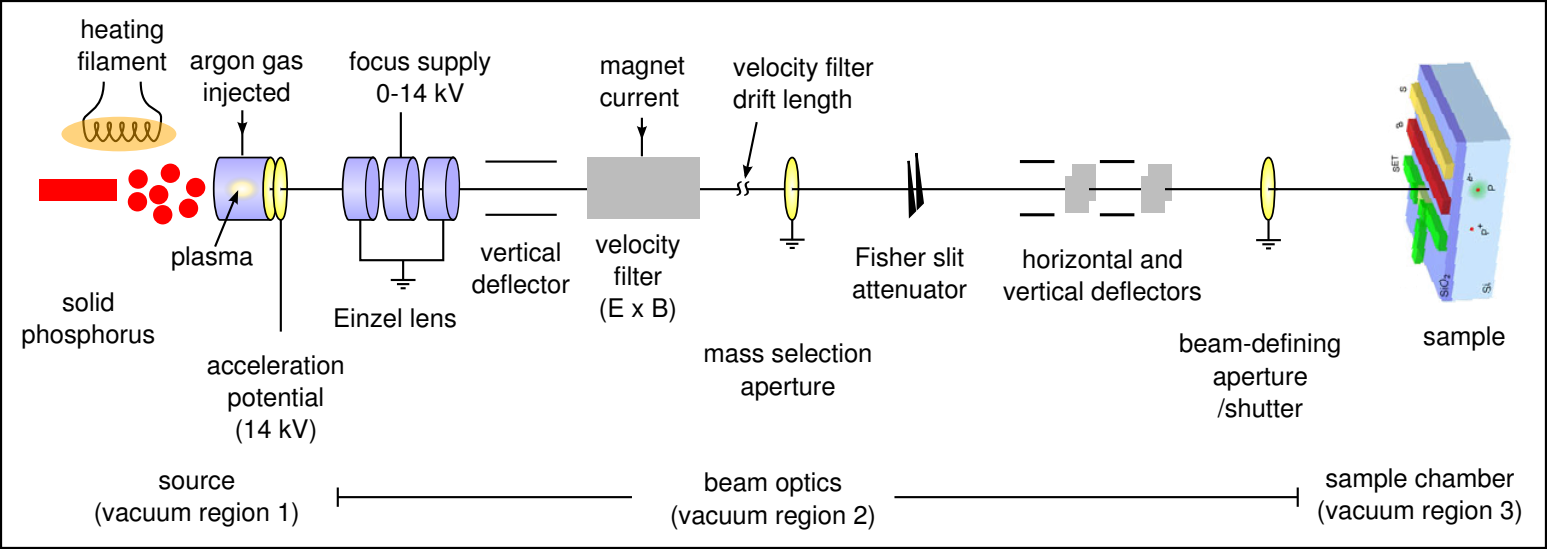

heating filament
argon gas injected
focus supply 0-14 kV
magnet current
velocity filter drift length
plasma
solid phosphorus
acceleration potential (14 kV)
Einzel lens
vertical deflector
velocity filter (E x B)
mass selection aperture
Fisher slit attenuator
horizontal and vertical deflectors
beam-defining aperture /shutter
sample
source (vacuum region 1)
beam optics (vacuum region 2)
sample chamber (vacuum region 3)